

FEATURED:

DIGITAL APPLY TIMER

BUILD IN COUNTER

AUTO DRIP FUNCTION
FOR 2 COMPONENT
GLUE APPLICATION

2 COMPONENT GLUE
CURING ALARM


μPROCESSOR CONTROL

SPEED CONTROL TURN TABLE
0 ~ 160RPM

MAX WORKING DIAMETER
440MM

CYLINDER WORKING STROKE
80MM*1, 140MM*1

DIMENSION
300(W)*360(L)*580(H)

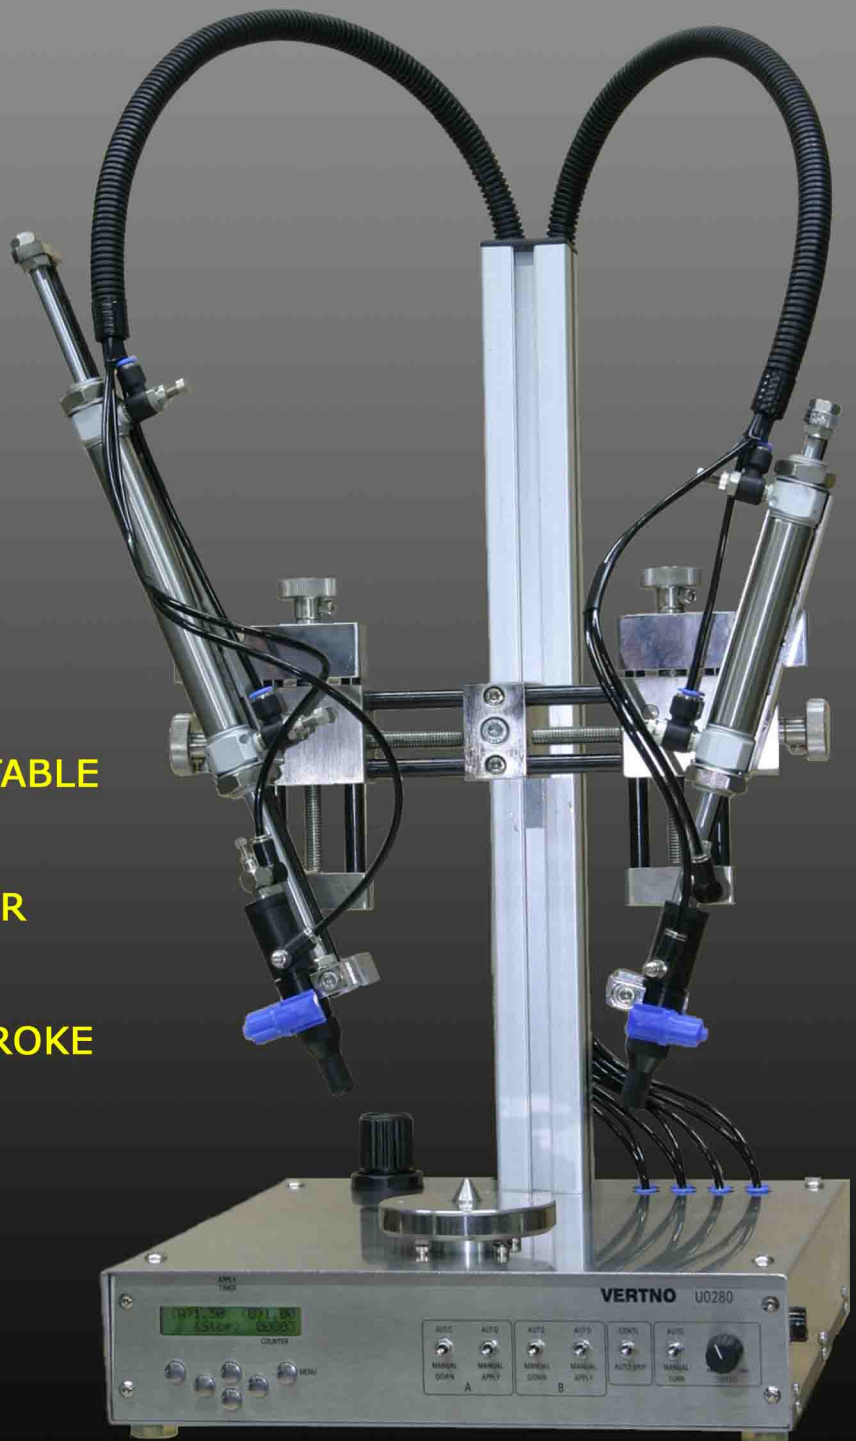

U0280 TABLE TOP 2 POINTS DISPENSING MACHINE